



LIS

Installation system LIS CW1 with cistern for wall-hung WC, dual flush 6/3L (adjustable to 4.5/3L)

DIMENSIONS

Length	500 mm
Width	140 mm
Height	1120 mm

OPTIONS

000 - standard option

Net weight (kg) : 14.5

Suitable for : Wall-hung WC



Flushing type
Flushing type: Dual flush 4.5/3 litres




Flushing type
Flushing type: Dual flush 4/2 litres



Flushing type
Flushing type: Dual flush 6/3 litres

TECHNICAL DRAWINGS

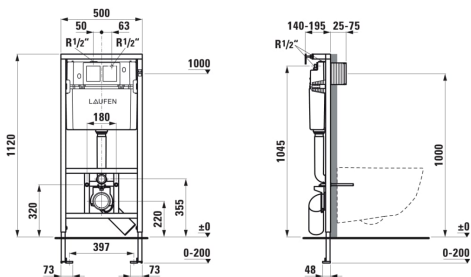

COMPATIBLE WITH



Wall-hung WC Advanced
'compact', washdown,
rimless

H820083...0001



Wall-hung WC Advanced,
washdown, rimless

H820080...0001



Wall-hung WC Basic,
washdown, rimless

H820081...0001



Flush plate AW1, dual flush

H895661...0001



Flush plate Inox AW2, dual
flush, vandalproof

H8956620000001



Electronic glass flush plate
AW3, contactless, dual
flush

H895663...0001



Electronic glass flush plate
AW4, contactless, dual
flush

H895664...0001

LIS

The LAUFEN installation system LIS is the perfect solution for safely, quickly and easily installing LAUFEN's wall-hung toilets. The range includes various concealed elements for dry and wet construction, and makes a wide variety of different installation scenarios realisable. All wall mounted units are equipped with a toilet tank that has a water-saving dual flush system, meaning flushing options can be set to either 6/3 litres or 4.5/3 litres.

